

TX6-28™ Category 6 U/UTP 28 AWG Copper Cable – LA, APAC, EMEA

specifications

Category 6 cable shall be constructed with 28 AWG copper conductors with polyethylene (PE) insulation. The copper conductors shall be twisted in pairs and covered by a low smoke, flame-retardant CM/LSZH/LSZH-FR jacket. This innovative small cable diameter design allows for improved pathway capacity, tighter bend radius and provides flexibility when installing.



technical information

Electrical performance:	Certified channel performance in a 4-connector configuration up to 50 meters and exceeds ANSI/TIA-568-C.2 Category 6 and ISO 11801 Class E standards at swept frequencies up to 250 MHz. Consult "Installation Guide" for more detail on proper channel configurations. Note: The cable utilizes 28 AWG conductors which does not meet the 24 to 22 AWG conductor size of horizontal cable in ANSI/TIA-568-C.2 and IEC 61156-5, resulting in increased attenuation which de-rates the maximum channel distance to 50 meters (164 feet). Proper termination requires the use of jack CJT688TG*.
Cable diameter:	4.0mm (0.157 in.) nominal
Conductor/insulator:	28 AWG bare copper covered by PE insulation
Insulation diameter:	1.02mm - 1.31mm (.040 in. - .052 in.)
Flame rating:	UL 1685, IEC 60332-1, IEC 60332-3-25, IEC 60754-1 and 2, IEC 61034-2; EN50575: Euroclass Eca
PoE compliance:	Meets IEEE 802.3af and IEEE 802.3at for PoE applications
Installation tension:	80N (18 lbf) maximum
Temperature rating:	0°C to 50°C (32°F to 122°F) during installation -20°C to 75°C (-4°F to 167°F) during operation and storage
Cable jacket:	CM/LSZH/LSZH-FR
Cable weight:	5.8kg/305m (12.8 lbs/kft.) nominal
Packaging:	305m (1000ft.) in an easy payout carton Package tested to ISTA Procedure 1A

key features and benefits

Third party tested	Cable has been tested as part of the TX6-28™ Category 6 U/UTP Copper Cabling System by an independent laboratory and complies with the electrical channel requirements of the following standard: ANSI/TIA-568-C.2 Category 6 and ISO 11801 Class E
Smaller cable diameter and round flexible design	Allows efficient use of pathways and spaces by improving fill capacity and reducing required bend radius resulting in an easier cable routing and management
Extended temperature range	Allows operation in 75° C (167° F) ambient environment providing error-free performance in high density cabinets and large cable bundles for running PoE plus applications
Easy payout carton	Ensures proper performance and provides quick installation
Descending length cable markings	Easy identification of remaining cable reduces installation time and cable scrap

applications

TX6-28™ Category 6 U/UTP Copper Cable is a component of the Panduit TX6-28™ Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future.

With certified channel performance to the ANSI/TIA-568-C.2 Category 6 standard up to 50 meters, this system will support the following applications:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token Ring 4/16

TX6-28™ U/UTP Copper Cabling System

TX6-28™ U/UTP Copper Cable

CM/LSZH/LSZH-FR: PUD6C2804"-CE

Category 6 28 AWG Patch Cord

Patch cord: UTP28SP**

Category 6 28/30 AWG Jack Module

Jack module: CJT688TG*

8-Position, 8-Wire 28 AWG Modular Plug

Modular plug: SP628-C

Cable Prep Tools

Wire snipping

tool: CWST

Wire stripping

tool: CCAST

**To designate cable color, add suffix BU (Blue) or WH (White). For additional cable colors, contact Customer Service.

*For standard patch cord colors, add suffix IW (Off White) BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), GY (Gray), PK (Pink), or VL (Violet).

**For patch cord lengths 1 to 50 feet (increments of one foot), and 55 to 150 feet (increments of five feet), change the length designation in the part number to the desired length. For lengths 0.5 to 10 meters (increments of half meter), 11 to 20 meters (increments of one meter), and 25 to 50 meters (increments of five meters), change the length designation in the part number to the desired length.

*To designate color for jacks, add suffix IW (Off White), EI (Electric Ivory), IG (International gray), AW (Arctic White), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), or VL (Violet).


Visit www.panduit.com for connectivity components

TX6-28™ Category 6 U/UTP 28 AWG Copper Cable – LA, APAC, EMEA

additional specifications

Mechanical Test	
Ultimate Breaking Strength	200 N (45 lbf)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
Nominal Velocity of Propagation (NVP)	65%
Operating Voltage, Maximum	80V

cable construction

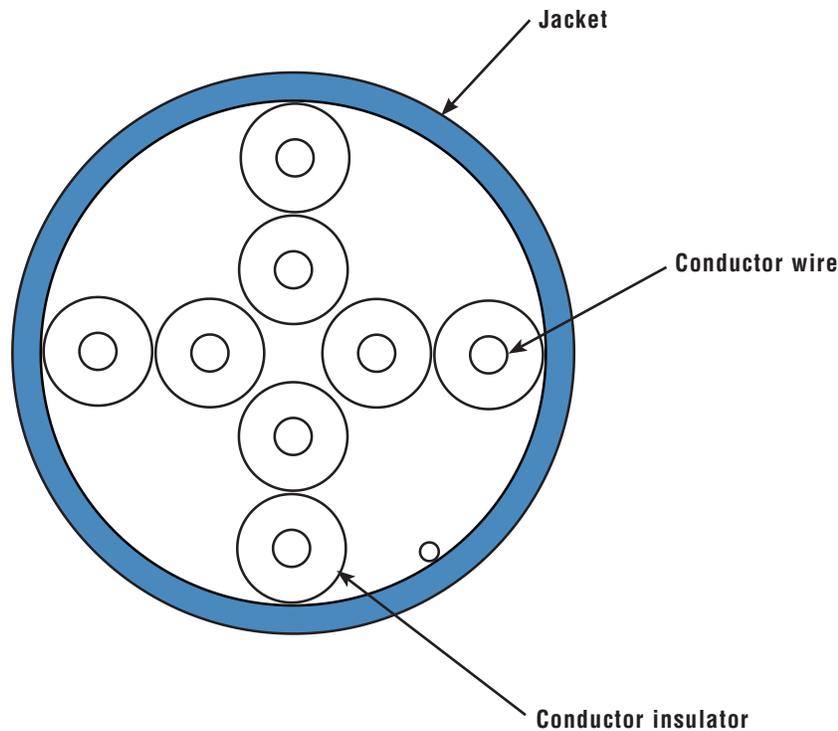

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2018 Panduit Corp.
ALL RIGHTS RESERVED.
COSP390--WW-ENG
7/2018